


## SPECIFICATIONS

- (1) MAIN MATERIAL: ALUMINUM PLATE.
- (2) BURNER : SPECIAL MADE BURNER FOR HK-3
- (3) FUEL : BENZINE
- (4) MAX. QUANTITY OF FUEL TO BE SUPPLIED: 40 cc
- (5) TIME FOR CONSUMING FUEL OF 10 cc :  
     FIXED TEMPERATURE DETECTOR : 1 HOUR  
     RATE-OF-RISE DETECTOR : 1.5 HOURS
- (6) MAX. TEMPERATURE OF HEATING : APPROX. 220 °C
- (7) WEIGHT : APPROX. 585g
- (8) CALIBRATION : WITHIN 10 YEARS
- (9) RESPONSE TIME OF DETECTOR :

RATE-OF-RISE DETECTOR		FIXED TEMPERATURE DETECTOR	
SENSITIVITY CLASS	RESPONSE TIME	SENSITIVITY CLASS	RESPONSE TIME
CLASS 1	WITHIN 30 sec.	SPECIAL CLASS	WITHIN 40 sec.
CLASS 2	WITHIN 30 sec.	CLASS 1	WITHIN 60 sec.
		CLASS 2	WITHIN 120 sec.

NOTE : IF THE DIFFERENCE BETWEEN THE NOMINAL OPERATION TEMPERATURE AND AMBIENT TEMPERATURE EXCEEDS 50°C, THE OPERATION TEMPERATURE MAY BE SET TO THE VALUB WHICH IS TWO TIMES HIGHER THAN THE AMBIENT TEMPERATURE

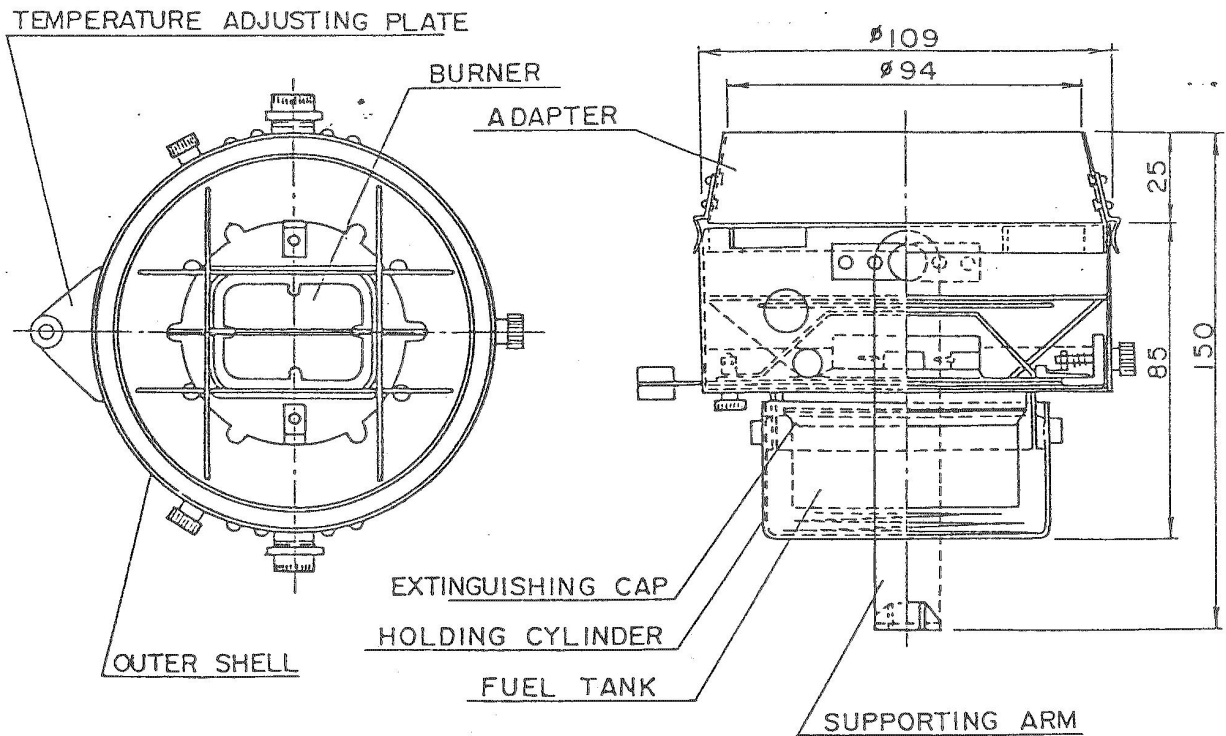

MODEL HK - 3		
HEAT DETECTOR TESTER		
UNIT : mm	DESIGNED BY <i>M. Nozawa</i>	TRACED BY
SCALE : /	CHECKED BY <i>H. Kato</i>	APPROVED BY <i>T. Yamada</i>
DATE : AUG. 30. '89		NO.
DWG.NO. HK 6045E	◇	
NOHMI BOSAI LTD.		