

FDKLU001-PSHA

COMBINATION PHOTOELECTRIC SMOKE / HEAT DETECTOR



Features

- Wide Sensitivity Range of 3.4 to 12.0%/m (1.05 to 3.82%/foot)
- 57°C (135°F) restorable Heat Detector
- True Analog Detector
- UL listed Smoke Calibration and Sensitivity
- Optional Locking tab to prevent unwanted removal
- Simple and Accurate Address Setting without mechanical switches
- LED for 360° Viewing



Description

The Combination Photoelectric Smoke/Heat Detector (FDKLU001-PSHA) is an Analog/Addressable smoke detector and fixed temperature heat of Integlex Multicrest series. The FDKLU001-PSHA is a low profile combination smoke/heat detector with a wide sensitivity range. The heat sensing portion utilizes a proven thermistor for accurate and reliable heat detection. The detector and base (not included) are made of a durable plastic in an eggshell white (off white) to blend in with the ceiling.

The FDKLU001-PSHA has a sensitivity range of 3.4 to 12.0%/m (1.05 to 3.82 %/foot) and is UL and cUL listed. The FDKLU001-PSHA is also a 57°C (135°F) restorable heat detector. The FDKLU001-PSHA can be configured for drift compensation and has built in dirty detector warning as well as. The FDKLU001-PSHA and the control panel communicate over a proven and robust digital communication path and the system analyzes the level of alarm at the particular device. The total polling speed is less than five (5) seconds, well under the UL requirements. The FDKLU001-PSHA is listed to both UL 268 Smoke Detection Standard and UL 521 Heat Detection Standard.

The FDKLU001-PSHA has a single LED that allows for 360° viewing. The detector is compatible with any of the Nohmi bases and simply twists on. The FDKLU001-PSHA is addressed using the hand held programmer or the control panel addressing function.

Ordering Information

Model no. FDKLU001-PSHA

Air Velocity Ratings

The FDKLU001-PSHA has an Open Area of Protection air velocity rating of 0 to 91.4m (300 feet) per minute.

The FDKLU001-PSHA is UL/ULC listed on maximum 9.14m (30 feet) spacing limitation on smooth ceiling.

Refer to NFPA 72, for specific information regarding detector spacing, placement, and special applications.

Spacing

The FDKLU001-PSHA is UL/ULC listed with a recommended maximum spacing of 9.1m (30 feet).

Refer to NFPA 72 for specific information regarding detector spacing, placement and special applications.

Specifications

No.	Item	Specification
1	Working voltage range	22.0 to 24.0 V
2	Standby current	250 µA
3	Alarm indicator	1 LED
4	Alarm indicator current	1.2 mA D.C
5	Alarm set-point range	3.4 to 12.0%/m (1.05 to 3.82 %/foot)
6	Installation temperature range	0°C to 46°C (32°F to 115°F)
7	Operating relative humidity range	0% to 93% (Non-condensing)
8	Start-up time	Max. 1 sec.
9	Color	Eggshell White
10	Weight (without base)	85g (2.99 oz)
11	Dimensions (without base)	Height: 43 mm (1.69 inch) Diameter: 99 mm (4.0 inches)

Setting the Address

Each addressable module, smoke detector, heat detector and combination detector must have the address set before connecting the device to the Signaling Line Circuit (SLC) loop. The address is set using the hand held device programmer or the addressing feature on the control panel.


Compatible Bases

All bases will mount on a single gang, double gang, octagon, 4 inches square or mud ring electrical box.

No.	Device	Description
1	FZBU004-AB4	4 inches Standard Base
2	FZBU003-AB6	6 inches Standard Base
3	FZBU005-AIB	6 inches base that has an isolator module included. The base is pre-wired with a pluggable jumper to the module.
4	FZBU005-ARB	6 inches base that includes a dual relay module. One relay is rated for 8 amps at 240 VAC/30 VDC and the second is rated for 2 amps at 240 VAC/30 VDC. The base is pre-wired with a pluggable jumper to the module.
5	FZBU005-ASB	6 inches base with sounder module included. Sound pattern is provided from external source. The base is pre-wired with a pluggable jumper into the module.

Wiring Diagram

Typical wiring of detector base onto which detector is mounted.

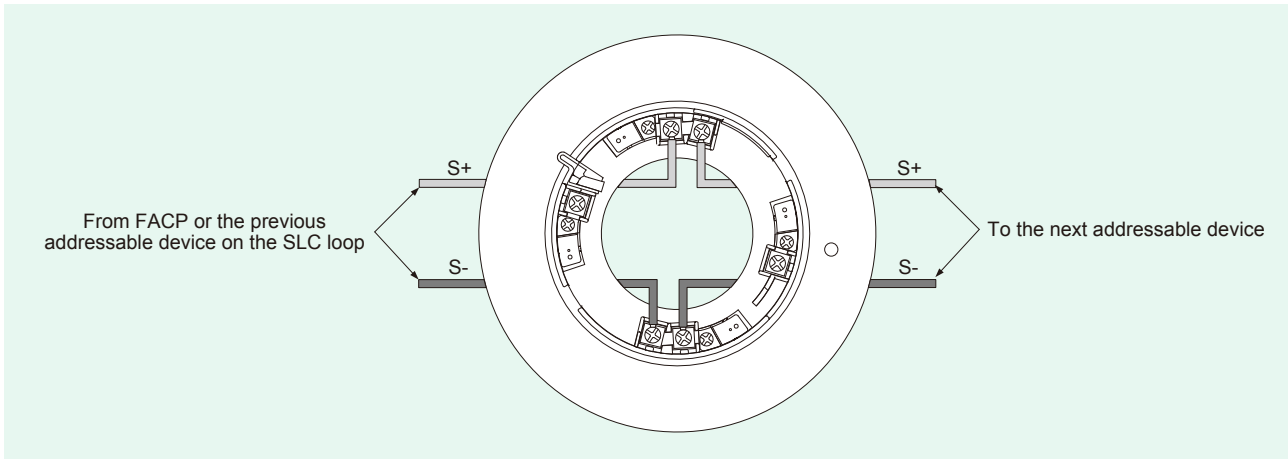

NOTICE

- These instructions do not purport to cover all the details or variations in the equipment described, nor provide for every possible contingency to be met in connection with installation, operation and maintenance.
- Specifications are subject to change without notice. Contact Nohmi before relying on above specifications.
- Actual performance is based on proper application of the product by a qualified professional.
- Should further information be desired or should particular problems arise, which are not covered sufficiently for the purchaser's purpose, the matter should be referred to Nohmi or a distributor in your region.

NOHMI
NOHMI BOSAI LTD.

- Head Office: 4-7-3 Kudan-Minami, Chiyoda-ku, Tokyo 102-8277, Japan
 - Phone: (81)3-3265-0231
 - F A X: (81)3-3265-5348
- URL <http://www.nohmi.co.jp/english/>

Contact